



UNLESS A PROFESSIONAL SEAL WITH SIGNATURE AND DATE IS APPLIED, THIS DOCUMENT IS PRELIMINARY AND IS NOT INTENDED FOR CONSTRUCTION, RECORDING PURPOSES OR REPRESENTATION.

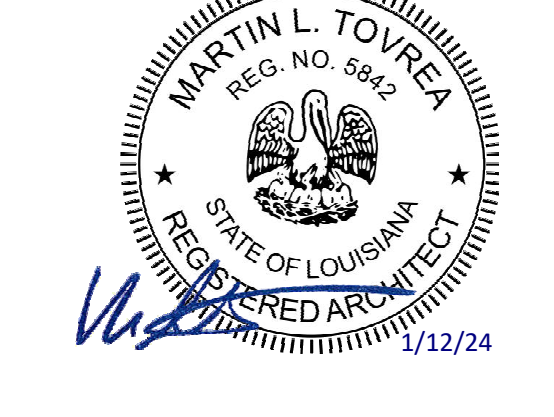

General Notes (Floor Plans):

1. ALL WALL TYPES TO BE A30 UNLESS OTHERWISE NOTED.
2. ALL WALL DIMENSIONS ARE TO FACE OF WALL UNLESS OTHERWISE NOTED.
3. MASONRY WALLS ARE NOMINALLY CENTERED ON GRID LINES AND MASONRY DIMENSIONS ARE NOMINAL UNLESS OTHERWISE NOTED.
4. DOORS IN STUD WALLS NEAR PERPENDICULAR WALLS ARE LOCATED 4" OFF FACE OF PERPENDICULAR WALL UNLESS OTHERWISE NOTED.
5. DOORS IN MASONRY WALLS ARE LOCATED IN ROUGH OPENINGS DIMENSIONED ON SHEET.
6. SEE GENERAL ACCESSIBILITY SHEET FOR HEIGHTS AND LOCATIONS OF TOILET ACCESSORIES.
7. CONTRACTOR TO FIELD VERIFY ALL MEASUREMENTS AND CONDITIONS NEW AND EXISTING. NOTIFY THE ARCHITECT/OWNER'S REPRESENTATIVE OF ANY DISCREPANCIES.
8. ENLARGED PLANS MAY BE ROTATED OR MIRRORED; COORDINATE WITH OVERALL FLOOR PLAN.
9. CONTRACTOR TO PROVIDE 4" HIGH PLYWOOD BACKER BOARD IN ALL MECHANICAL AND ELECTRICAL ROOMS MOUNTED 3'-6" A.F.F. FOR PERIMETER OF ROOM.
10. REFER TO SPECIFICATIONS MANUAL FOR COLD ROOM REQUIREMENTS.
11. REFER TO SPECIFICATIONS MANUAL FOR EQUIPMENT LIST AND REQUIREMENTS.
12. PROVIDE WATERPROOFING UP TO 36" RADIUS AT FLOOR DRAINS. REFER TO ADDITIONAL WATER PROOFING REQUIREMENTS UNDER CONTROLLED TEMPERATURE ROOMS ON LEVEL 4.
13. REFERENCE CODE COMPLIANCE PLANS FOR ELEMENTS REQUIRING INSTALLATION IN COMPLIANCE WITH ADA, INCLUDING BUT NOT LIMITED TO CASEWORK, PLUMBING AND EQUIPMENT.

Key Plan:

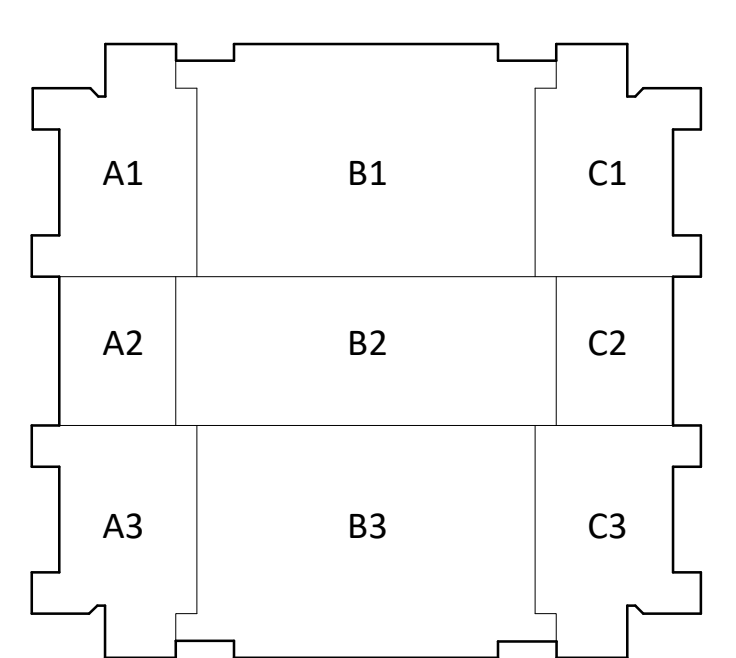

FOR
REFERENCE
ONLY

ADD ALTERNATE #1
REFER TO A900

